



WEVER & DUCRÉ
LIGHTING

BLIEK ROUND 1.0 LED

125161B5

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling

Recessed

Jet Black

IP20

Interior

585^a to 785^b lm

RAL 9005^c

LED

3000 K

CRI 90

L80 / 50000 h

2-step binning

MR 0.59

MDER 0.53

OPTICAL

Flood

Beam angle 36°

PHYSICAL

Diameter 135 mm

Height 59 mm

0.45 kg

wire springs

Tilt max 60°

Rotation 355°

ELECTRICAL

excl. power supply

18 V

Total connected power 7.9^a to 11.6^b W

LED Inset 5.9^a to 8.7^b W

350^a to 500^b mA

PC3

Safety distance 0.3 m

CUTOUT

Diameter 126-130 mm

Min. ceiling thickness 4 mm

Max. ceiling thickness 25 mm

Recessed depth 75 mm


^a 350mA

^b 500mA

^c RAL Palette colors may deviate slightly due to production conditions.



Round ceiling recessed downlight made from die-cast aluminium; adjustable; surface Jet Black; powder coated; matt texture; RAL 9005; inner ring black; installation without tools using wire springs; suitable for ceiling thickness of 4-25 mm; recessed depth 75 mm; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; Binning initial 2 MacAdam; CRI 90; beam angle 36°; 355° rotatable and 60° tiltable; degree of protection IP20; PC3; IC rated; power supply not included; light source replaceable by end-user;






WEVER & DUCRÉ
LIGHTING

BLIEK ROUND 1.0 LED

125161B5

LIGHT DISTRIBUTION

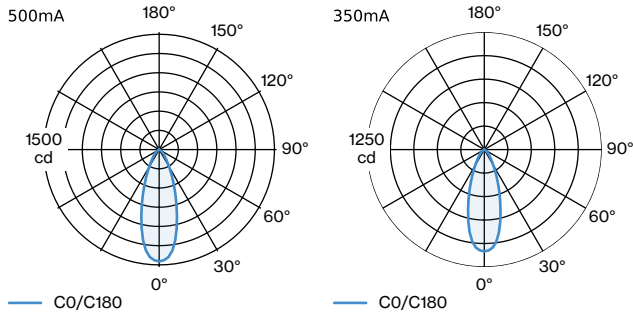

CONE DIAGRAM

flood 36° 500mA

h (m)	EO° (lx)	ø (m)
1	1455	0.65
2	364	1.29
3	162	1.94
4	91	2.59
5	58	3.23

flood 36° 350mA

h (m)	EO° (lx)	ø (m)
1	1085	0.65
2	271	1.29
3	121	1.94
4	68	2.59
5	43	3.23

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.92	0.88	0.85	0.81
LSF	1	1	1	1	1

MF LMF × RSMF × LLMF × LSF RSMF^a Room Surface Maintenance Factor
 MF Maintenance Factor LLMF Lamp Lumens Maintenance Factor
 LMF^a Luminaire Maintenance Factor LSF Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

ELECTRICAL

Power Supply

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
Driver 6W 350mA 3-22V	68-35-21	3 - 22V	9 0 2 1 3 2 0 2
Driver 10W 500mA 11-20V	101.5-51-29.2	11 - 20V	9 0 2 1 4 4 0 5
Driver 10W 350mA 14-28V	101.5-51-29.5	14 - 28V	9 0 2 2 3 4 0 1
Driver 10W 350mA 12-28V	102-38-21	12 - 28V	9 0 2 2 3 4 0 2

Power Supply 350mA

TYPE	L · W · H (MM)	ORDERCODE
Driver 10W 2.5-26V	124-31-21	9 0 2 4 3 4 0 1

Power Supply 500mA

TYPE	L · W · H (MM)	ORDERCODE
Driver 20W 5-40V	111-52-22	9 0 2 4 4 6 0 2

[125161B5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BVBA apply.
 © Wever & Ducré BVBA · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com

January 14, 2022