

Razor Super Max 50

Direct // Direct/Indirect


8131.SM50

Caribou




Accessories

Honeycomb Diffuser

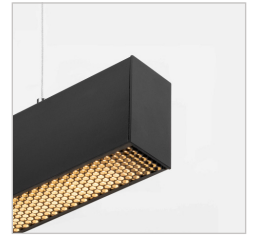

Black Edition Diffuser

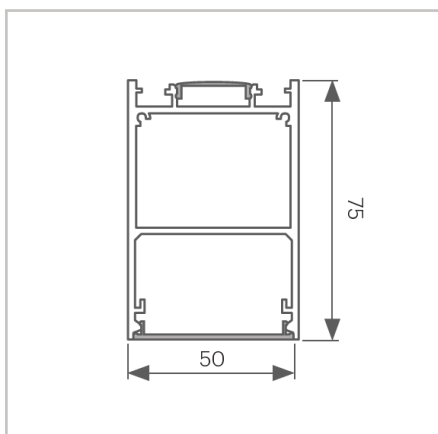

Super Max 50

Various Outputs - See Following Spec Page

3000K // 4000K

IP20 // IP54 // IP66

Surface Mounted // Suspended // Wall Mounted

Non Dimmable // DALI Dimmable // Bluetooth // 1-10V

Direct // Direct/Indirect

Flat White // Ace Black // Custom

3 Year Warranty

Caribou

Unit 11/18 Ellerslie Road,
Meadowbrook, QLD 4131

(07) 3999 7700
sales@caribou.com.au

Razor Super Max 50

Caribou

8131.SM50

Specification Code Example

8131.SM50SM.40254025.XODAF.35

Mounting Options

Code	Type
SM	Surface Mounted
SP	Suspended
WM	Wall Mounted

3000K Board Setting - Direct

Code	lm/m	mA/M	Wattage/M
3025	1485	446	12
3030	1661	536	14
3035	2152	625	16.5
3040	2214	714	18.5
3045	2552	804	21
3050	2768	893	23.5
3055	3045	982	25.5
3060	3393	1071	28
3065	3598	1161	30.5
3070	3875	1250	32.5
3075	4152	1339	35
3080	4429	1429	37
3085	4705	1518	40

4000K Board Setting - Direct

Code	lm/m	mA/M	Wattage/M
4025	1600	446	12
4030	1768	536	14
4035	2152	625	16.5
4040	2357	714	18.5
4045	2718	804	21
4050	2946	893	23.5
4055	3241	982	25.5
4060	3607	1071	28
4065	3830	1161	30.5
4070	4125	1250	32.5
4075	4420	1339	35
4080	4714	1429	37
4085	5009	1518	40

3000K Strip LED Setting - Indirect

Code	lm/m	Wattage/M
3010	768	9.6
3015	1152	14.4
3020	1536	19.2

4000K Strip LED Setting - Indirect

Code	lm/m	Wattage/M
4010	768	9.6
4015	1152	14.4
4020	1536	19.2

IP Options

Code	Type
X0	IP20
X4	IP54
X6	IP66
X7	IP67

Dimming Options

Code	Type
ND	Non Dimmable
DA	DALI
BL	BlueTooth
AD	0-10

Diffuser Options

Code	Type
F	Frosted Diffuser
D	Dark Diffuser

Finish Options

Code	Type
25	Flat White
35	Black Ace
XP	Custom

Caribou

Unit 11/18 Ellerslie Road,
Meadowbrook, QLD 4131

(07) 3999 7700
sales@caribou.com.au